

## 1-1/2" Heavy Duty Hydraulic Regulator

**Series 20597**

### Features

- ▶ Original Shear-Seal® technology
- ▶ High flow capacity
- ▶ Large pressure range
- ▶ Tolerates contaminated media
- ▶ Fail-safe motor control options
- ▶ Self venting
- ▶ Surge dampening

### Applications

- ▶ Land-based and offshore oil drilling controls
- ▶ BOP control units
- ▶ Pressure sensitive equipment



### General Specifications\*


<b>Pressure:</b> Supply/Inlet Pressure: 3,000 psi (207 bar) 5,000 psi (345 bar)  Regulated Pressure Range at 3,000 psi Supply Pressure: High Sensitivity: 200 - 1600 psi (13.7 - 110 bar) Full Range: 350 - 2800 psi (24.1 - 193 bar)  Regulated Pressure Range at 5,000 psi Supply Pressure: High Sensitivity: 300 - 1600 psi (21 - 110 bar) Full Range: 500 - 3300 psi (34 - 228 bar)  Media: Hydraulic oil or lubricated water  Fluid Temperature Range: -30° to +250°F (-34° to +121°C)  Proof Pressure: 7,500 psi (517 bar)	<b>Materials of Construction:</b> Body: Stainless steel (std.)  Flanges: Phosphate coated alloy steel (std.) Option: Stainless steel  Spring Tower: Manual: Stainless steel (std.) Pneumatic Motor model: Phosphate coated alloy steel (std.) Hydraulic Motor model: Phosphate coated alloy steel (std.)  Standard O'ring Material: Buna N  Socket Head Screws: Stainless steel (std.)  Wetted Parts: Stainless steel
<b>Flow:</b> Flow Rate: 120 GPM (@ 50 ft/s)  Cv Inlet: 17.5  Cv Vent: 2.6	<b>Pneumatic Pilot Motor ("F" prefix):</b> Pilot Motor Working Pressure: 80 - 120 psi (5.5 - 8.3 bar)  Porting A & B: 1/4" NPT  Operating Temperature Range: 32° to +250°F (0° to +120°C)
<b>Porting:</b> Inlet 1: 1" NPT Standard, SAE Optional  Inlet 2: 1" NPT Standard, SAE Optional  Outlet: 1-1/2" NPT Standard, SAE Optional  Vent: 1" NPT Standard, SAE Optional	<b>Hydraulic Pilot Motor ("G" prefix):</b> Pilot Motor Working Pressure: 400 - 1600 psi (6.9 - 110 bar)  Porting A & B: SAE for 3/8" Tube (Size -6)  Operating Temperature Rating: -40° to +250°F (-40° to +121°C)
	<b>Approximate Shipping Weight:</b> Manual: 67 lbs. (30.4 kg)  Pneumatic or Hydraulic Motor: 90 lbs. (40.8 kg)

\* See product configurator for additional options.

# 1-1/2" Heavy Duty Hydraulic Regulator

**Series 20597**

## Technical Drawings

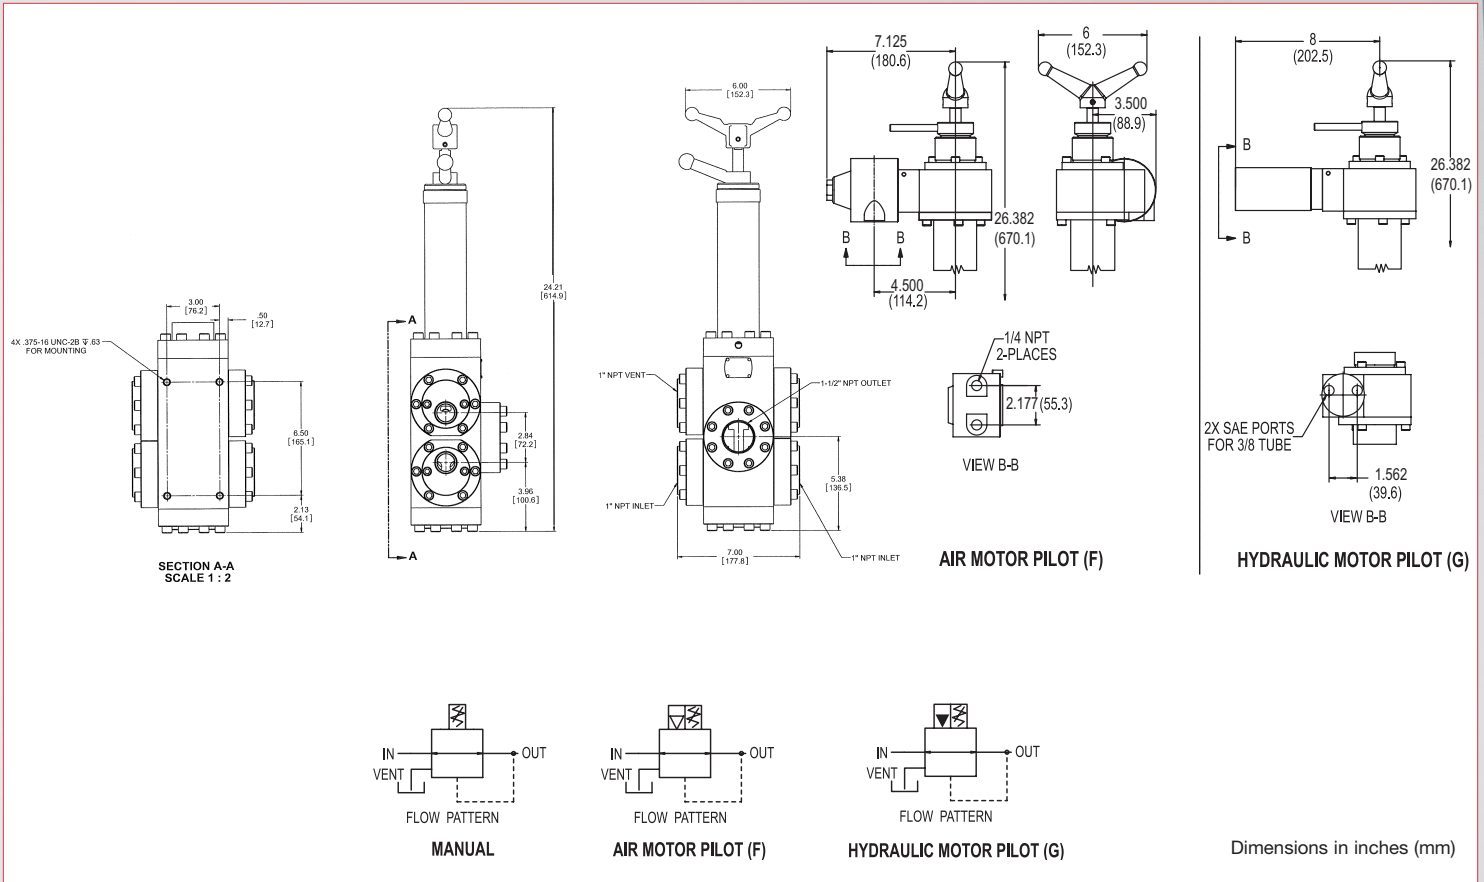

## Product Configurator

Example:

### Adjustment Method

Blank	Manual
F	Pneumatic failsafe motor
G	Hydraulic failsafe motor

### Option

Blank	NPT porting
-MS	SAE porting
-SS	Stainless steel flanges & trim

### Series

20597S6WQ2	1-1/2" Pressure regulator
------------	---------------------------

### Regulated Pressure Range

		Inlet Pressure	Regulated Range
Blank	High sensitivity	3000 psi	200 - 1600 psi (13.7 - 110 bar)
		5000 psi	300 - 1600 psi (21 - 110 bar)
-1	Full range	3000 psi	350 - 2800 psi (24.1 - 193 bar)
		5000 psi	500 - 3300 psi (34 - 228 bar)

