

DESCRIPTION

The Type-700BP Back Pressure Regulator is a high flow, highly accurate pneumatic relief valve with an adjustable set point. Its primary function is to provide protection against over pressurization in the downstream portion of a pneumatic system. This precision unit is capable of handling flows up to 50 SCFM. A rolling diaphragm provides the sensitivity that causes the Type-700BP to vent to atmosphere in response to the slightest upstream changes.

FEATURES

- **SENSITIVITY** - Provides quick response to controlled system pressure variation.
- **HIGH FLOW CAPACITY** - Flows up to 50 SCFM (depending on set point pressure and port size).
- **COMPENSATING FLOW CONTROL** - Venturi type velocity-pressure tube adjusts main control valve opening in accordance with velocity pressure variations of flow from controlled system.
- **ON-LINE MAINTENANCE** - Unit can be disassembled and serviced without removing from the air line.

APPLICATIONS

The Type-700BP is used in place of a standard relief valve to provide protection against excessive build-up in supply pressure lines to instruments and other sensitive control devices.

The most common application is to control the air pressure in a system supplied by a compressor. Used in conjunction with a diaphragm operated inlet restricting valve and a bleed orifice, the Back Pressure regulator relieves excess compressor pressure while activating the intake restricting valve. When the regulator shuts off, the down-stream air vents through the bleed orifice allowing the restricting valve to open.

SPECIFICATIONS

Flow Capacity Up to 50 SCFM
(1,415 NI/min) depending on set point pressure and port size.
Sensitivity 1/8" (3.2 mm) water
Maximum System Pressure 250 psig (17.25 bar)
Mounting Pipe or Panel
Ambient Temperature 0°F to 150°F
Weight 1.5 lb (.68 Kg)
Materials of Construction: Body; diecast aluminum alloy, baked enamel finish. Trim; acetal, brass, and plated steel. Knob; phenolic plastic.




TYPE-700BP
PRECISION
BACK PRESSURE
REGULATOR

TYPE 700BP


PRECISION BACK
PRESSURE REGULATOR

FLOW CHARACTERISTICS

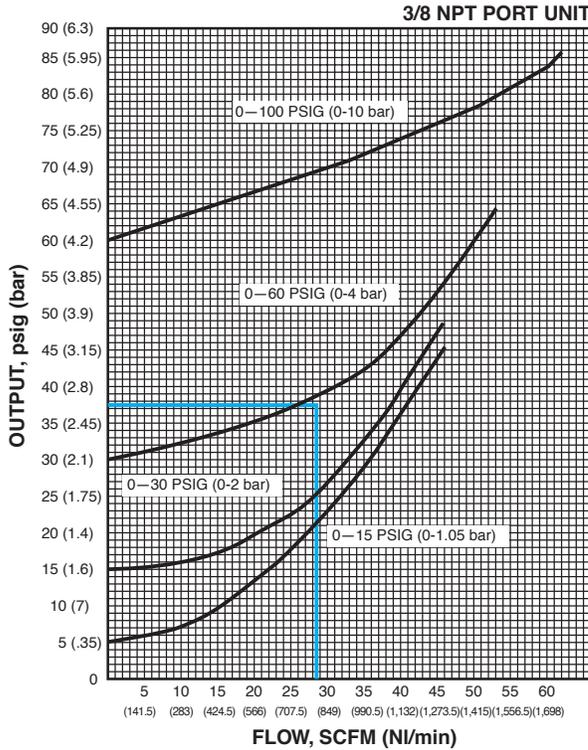

APPLICATION EXAMPLE

The Type 700BP is used to control the air pressure in a system supplied by a compressor. When system pressure reaches the Type 700BP set point, the unit starts relieving air pressure. This pressure is routed to an inlet valve causing it to close. Excess pressure vents through the bleed orifice and the valve opens to increase the compressor outlet pressure.

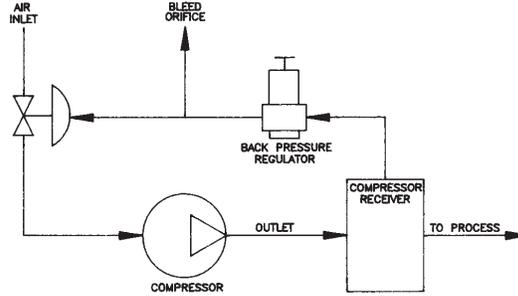

ORDERING INFORMATION

Part Number	Port Size (NPT)	Output Range	
		psi	bar
710-BA	1/4"	0-2	0-0.14
710-BC	1/4"	0-15	0-1
710-BD	1/4"	0-30	0-2
710-BE	1/4"	0-60	0-4
710-BF	1/4"	0-150	0-10
710-CA	3/8"	0-2	0-0.14
710-CC	3/8"	0-15	0-0.1
710-CD	3/8"	0-30	0-2
710-CE	3/8"	0-60	0-4
710-CF	3/8"	0-150	0-10
710-DA	1/2"	0-2	0-0.14
710-DC	1/2"	0-15	0-1
710-DD	1/2"	0-30	0-2
710-DE	1/2"	0-60	0-4
710-DF	1/2"	0-150	0-10

Options — Add proper letter onto end of part number.

- E - Tapped Exhaust:** allows captured exhaust. 1/4" NPT port.
- B - Mounting Bracket:** zinc-plated steel bracket for side mounting
- B - Mounting Bracket** prevents casual adjustment of output pressure
- U - 1/4" BSP Porting**
- X - ATEX 94/9/EC**

WARRANTY

ControlAir, Inc. products are warranted to be free from defects in materials and workmanship for a period of eighteen months from the date of sale, provided said products are used according to ControlAir, Inc. recommended usages. ControlAir, Inc.'s liability is limited to the repair, purchase price refund, or replacement in kind, at ControlAir, Inc.'s sole option, of any products proved defective. ControlAir, Inc. reserves the right to discontinue manufacture of any products or change products materials, designs or specifications without notice. Note: ControlAir does not assume responsibility for the selection, use, or maintenance of any product. Responsibility for the proper selection, use, and maintenance of any ControlAir product remains solely with the purchaser and end user.



8 Columbia Drive / Amherst, NH 03031 USA
 Website: www.controlair.com
 Email: sales@controlair.com
 603-886-9400 FAX 603-889-1844

An ISO-9001:2008 Certified Company

