

DESCRIPTION

The Badger Meter® Model THT Temperature Sensor provides accurate remote temperature sensing for use with Badger Meter Series 340 BN/MB Btu Transmitter, 3050 Series Monitor and other building automation applications.

The THT includes unique mounting hardware incorporating an isolation valve allowing the temperature probe to be "hot tapped", or installed in a working pipeline without shutting down or draining the line. This hot tap capability allows temperature sensors to be retrofit to existing pipelines at a fraction of the cost of thermowell installations. For Btu measurement or submetering applications, THT temperature sensors should always be installed in pairs to match their reaction time to temperature change.

The THT sensor features a precision 10 KΩ thermistor element encapsulated with a temperature conductive compound within a 316 stainless steel probe. These two-wire devices have a thermal accuracy of $\pm 0.36^\circ\text{F}$ (0.2°C).



Model THT Sensor



Temperature Probe Removed from Valve

SPECIFICATIONS

Sensing Element	2-wire thermistor (thermal resistor)
Accuracy	$\pm 0.36^\circ\text{F}$ (0.2°C) from $32\text{...}158^\circ\text{F}$ ($0\text{...}70^\circ\text{C}$)
Temperature Range	$0\text{...}250^\circ\text{F}$ ($-17\text{...}121^\circ\text{C}$)
Stability	0.024°F (0.13°C) over 5 years
Head Dissipation	2 mW/ $^\circ\text{C}$ typical before plotting
Wetted Materials	316 stainless steel, Viton® O-rings
Service Connection Size	1" NPT
Pressure Rating	1000 psi (69 bar)
Insertion Force Required	Approximately 20% of line pressure
Mounting	1" tap, tapping saddle or weldment
Electrical Connection	6" 24 AWG flying leads with 1/2" conduit thread

ORDERING INFORMATION


Model Number	Description
THT-000	1 in. stainless steel hot tap temperature sensor, complete
XTHT-000	Replacement thermistor probe
A-1027	Brass tapping nipple; adapts thread to NPT for tapping machine; reuseable

Temperature vs Resistance (10 KΩ Thermistors)


Temperature		Resistance Ohms
$^\circ\text{F}$	$^\circ\text{C}$	
32	0	32,654
50	10	19,903
68	20	12,493
77	25	10,000
86	30	8056
104	40	5325
122	50	3602
140	60	2488
158	70	1753
176	80	1257
194	90	917
212	100	679

DIMENSIONS

Model THT Sensor Dimensions

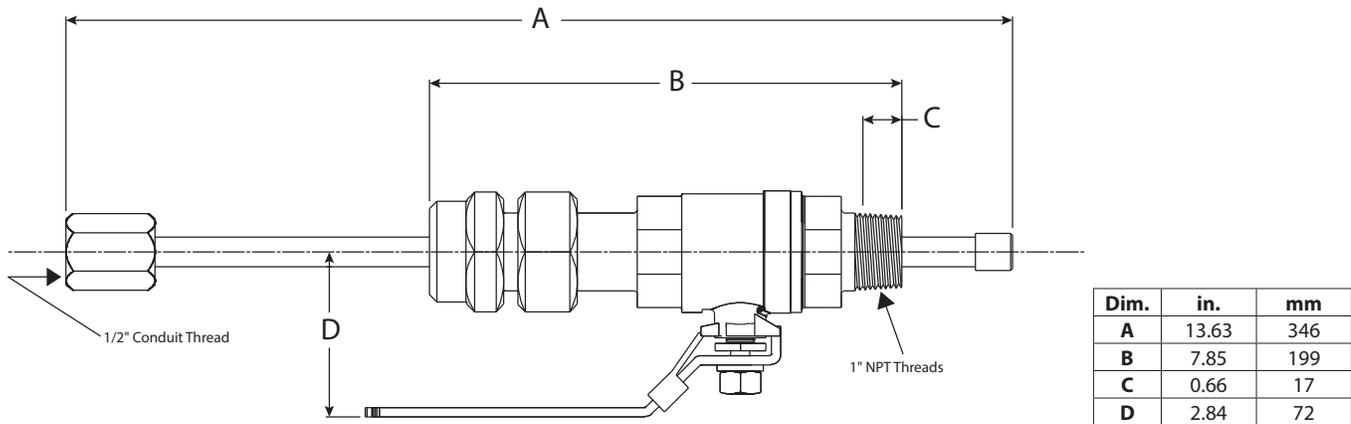

Model THT Ball Valve Dimensions

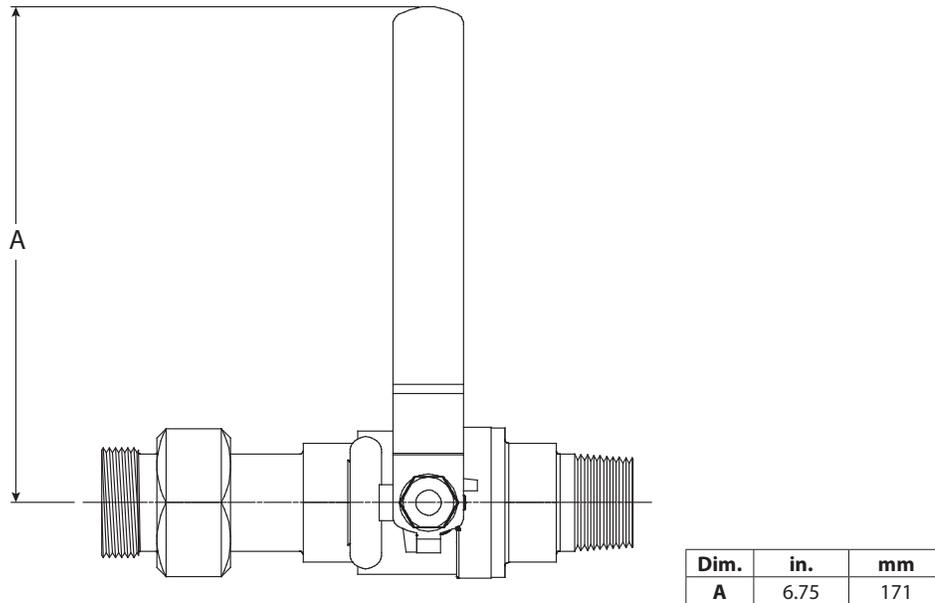

Control. Manage. Optimize.

Data Industrial is a registered trademark of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2015 Badger Meter, Inc. All rights reserved.

www.badgermeter.com

The Americas | Badger Meter | 4545 West Brown Deer Rd | PO Box 245036 | Milwaukee, WI 53224-9536 | 800-876-3837 | 414-355-0400
 México | Badger Meter de las Americas, S.A. de C.V. | Pedro Luis Ogazón N°32 | Esq. Angelina N°24 | Colonia Guadalupe Inn | CP 01050 | México, DF | México | +52-55-5662-0882
 Europe, Middle East and Africa | Badger Meter Europa GmbH | Nurtlinger Str 76 | 72639 Neuffen | Germany | +49-7025-9208-0
 Europe, Middle East Branch Office | Badger Meter Europe | PO Box 341442 | Dubai Silicon Oasis, Head Quarter Building, Wing C, Office #C209 | Dubai / UAE | +971-4-371 2503
 Czech Republic | Badger Meter Czech Republic s.r.o. | Mařikova 2082/26 | 621 00 Brno, Czech Republic | +420-5-41420411
 Slovakia | Badger Meter Slovakia s.r.o. | Racianska 109/B | 831 02 Bratislava, Slovakia | +421-2-44 63 83 01
 Asia Pacific | Badger Meter | 80 Marine Parade Rd | 21-06 Parkway Parade | Singapore 449269 | +65-63464836
 China | Badger Meter | 7-1202 | 99 Hangzhong Road | Minhang District | Shanghai | China 201101 | +86-21-5763 5412